




T23 Series Load Stabilizer

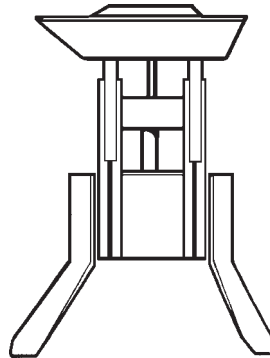

Hydraulic Requirements: Single function auxiliary kit

Model No.	Truck Capacity	Range Inside Pads	Weight	ET	HCG	VCG	Pad Reach	Pad Width
T23-30-30-30	3000	38 - 68	575	5	5	18	30	30
T23-30-36-36	3000	38 - 68	595	5	6	19	36	36
T23-30-42-42	3000	38 - 68	627	5	7	20	42	42
T23-55-30-30	5500	46 - 76	670	5	5	19	30	30
T23-55-36-36	5500	46 - 76	695	5	6	20	36	36
T23-55-42-42	5500	46 - 76	710	5	7	21	42	42

Maximum Pressure

2250 psi (150 bar)

Recommended Flow

6 gpm (27 litres)

Optional Auxiliary Hydraulics

3 way pressure reducing valve

Variable pressure reducing valve

Pressure gauge

Quick disconnect couplings

Things we need to know...



Weight of Load



Width of Load



Carriage Width



Max. Height of Load



Min. Height of Load



Forklift Capacity